


www.proxis-ndt.sk

iCONCEPTS
IMAGING SOLUTIONS

PROXiS Slovakia
www.proxis-ndt.sk

XLED PRO

DUAL VIEW
Videoscope System

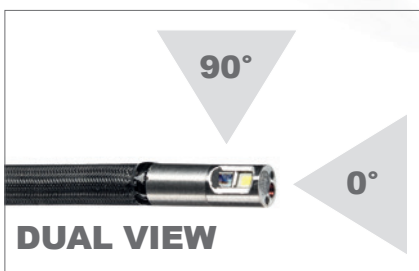

Technical data

iCAPTURE PRO

Display size:	7.0"
Display resolution:	1024x600 Pixel
Operating system:	EIOS (Endoscopic Imaging Operating System)
interface:	USB
Power supply, primary:	Rechargeable Li-ion battery
Power supply, secondary:	12V adapter (optional accessories)
Storage:	intern 16GB / USB (16GB in delivery)
Video format:	MPEG4 (.avi)
Image format:	BMP (.bmp), JPEG (.jpg), PNG (.png)

OTHER DATA

Ergonomics:	rotatable + swiveling
Weight:	1.28Kg
Dimensions:	see below
Housing:	Rugged PU with rubber shock protection
Tip operating temperature:	-25°C to +80°C /140°C less than 5 Minutes
System operating temperature:	-25°C to +46°C
Storage temperature:	-25°C to +60°C
Relative humidity:	95% less than - non condensing

XLED PRO DUAL VIEW

Sensor AIT Advanced Image Sensor

PROBES (mm)

	4,0	6,0
Working length (m)	1,5 - 4,0	1,5 - 7,5
Direction of view	0°/90°	0°/90°
Articulation (4-way)	4-way	4-way

